




55 GALLON DRUM MELTERS



Graphic touchscreen control gives you visibility and easy monitoring of all systems.

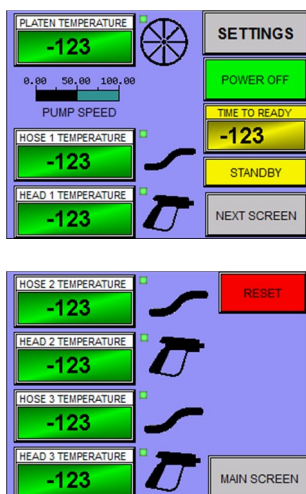

Daring LLC HI-MELT bulk melters only heat a thin layer of adhesive at a time therefore the integrity of today's modern adhesives are preserved. Oxygen and moisture is also sealed off from the adhesive further enhancing product performance. Hardened PLC with touch screen technology insures precision control with proven reliability.

Daring LLC
180 Englewood Drive
Suite B
Orion, Michigan 48359
Darringcompany.com

HI-MELT_r Bulk Melters



Specification

Type of System	Reciprocating pump or Gear pumps with variable speed motor
Number of Hoses	3 standard additional hoses optional
Maximum hydraulic pressure	3,000 psi Reciprocating pumps 1,200 psi Gear pump unit
Operating Temperature	Ambient to 425 °F
Ambient temperature	25°F to 100°F
Temperature at Stable	±3°F
Temperature sensor	Platinum PT-100
Pump rate ¹	200 lbs/hour
Electrical service⁴	240 VAC 1 phase standard 200 VAC 1 phase optional 208 VAC 1 phase optional 400 VAC 1 phase optional 480 VAC 1 phase optional 504 VAC 1 phase optional Additional
Maximum power ²	30,000 watts
Weight ³	820 lbs
Dimensions	26"W x 51 1/2"D x 66"-100"H
Pneumatic	80 psi Clean Dry Air



¹ Actual rate may vary due to adhesive, ambient conditions, application parameters, and voltage.

² maximum power will vary depending on option and configuration consult name plate data for installation.

³ Weight may vary depending on option and configuration.

⁴ Voltage must be maintained ± 10%

⁵ Pressures limited to 1,200 psi unless high pressure hoses are used.